


SD6500

Compressed air meter

SDR12DGXFRKG/US-100

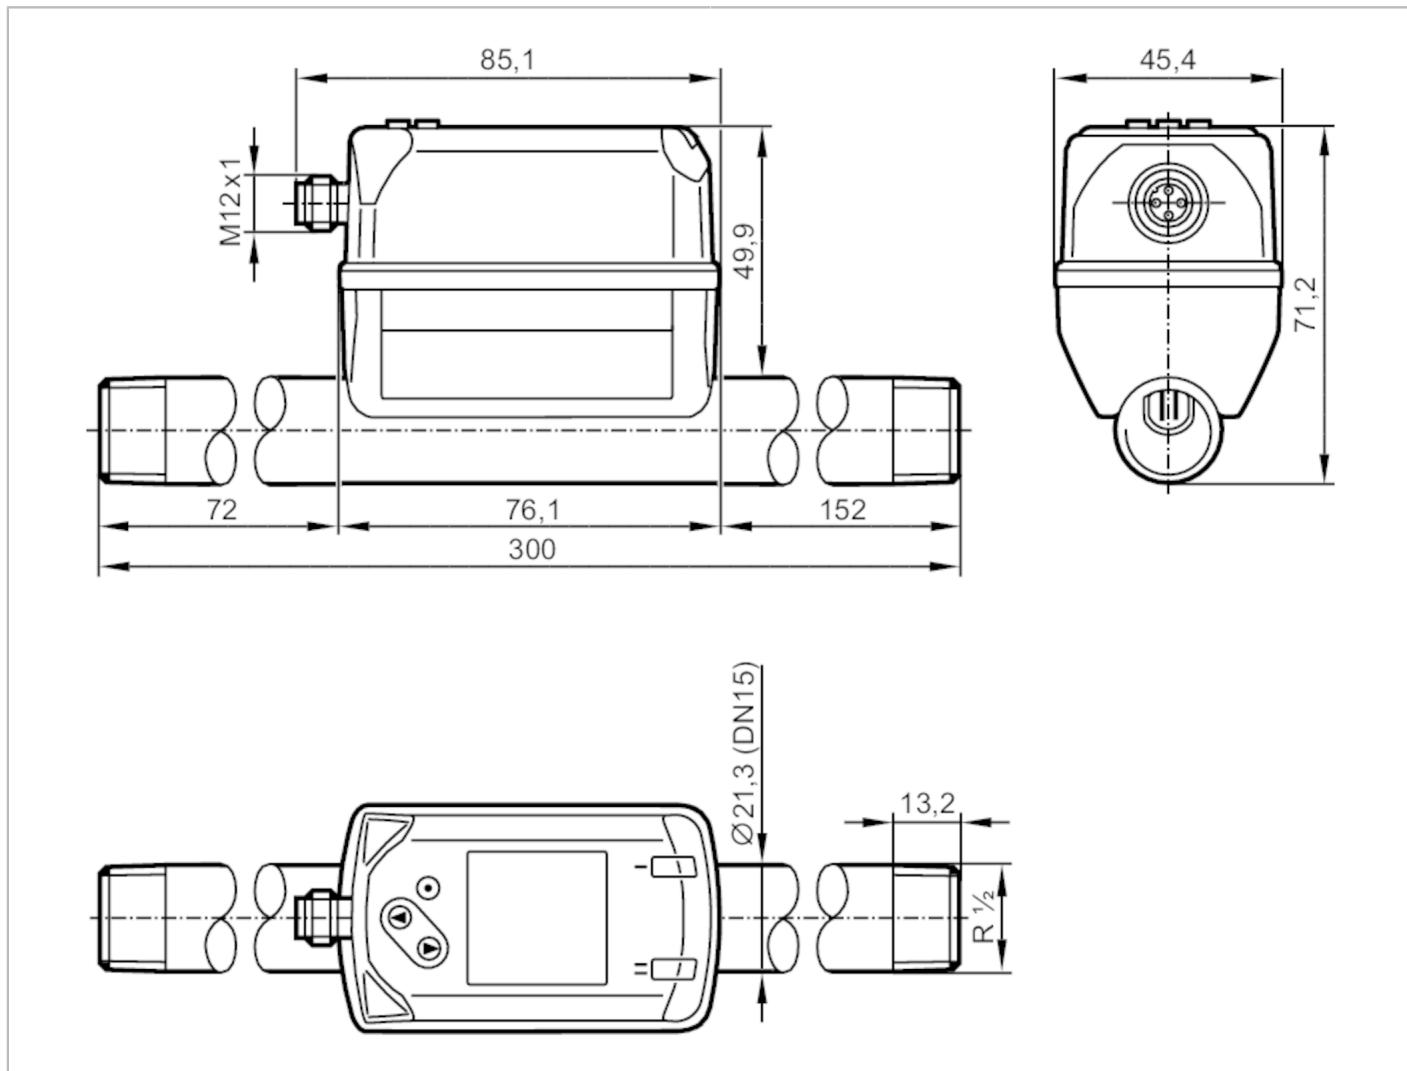

Product characteristics

Number of inputs and outputs	Number of digital outputs: 2; Number of analog outputs: 1	
Process connection	threaded connection R 1/2 DN15	
Temperature monitoring		
Measuring range	-10...60 °C	14...140 °F

Application

Application	for industrial applications	
Media	compressed air	
Medium temperature [°C]		-10...60
Min. bursting pressure [bar]		64
Min. bursting pressure [MPa]		6.4
Pressure rating [bar]		16
Pressure rating [Mpa]		1.6

SD6500



Compressed air meter

SDR12DGXFRKG/US-100

Electrical data			
Operating voltage	[V]	18...30 DC; (according to EN 50178 SELV/PELV)	
Current consumption	[mA]	< 80	
Protection class		III	
Reverse polarity protection		yes	
Power-on delay time	[s]	1	
Inputs / outputs			
Number of inputs and outputs		Number of digital outputs: 2; Number of analog outputs: 1	
Inputs			
Inputs		counter reset	
Outputs			
Output signal		switching signal; analog signal; pulse signal; IO-Link; (configurable)	
Electrical design		PNP/NPN	
Number of digital outputs		2	
Output function		normally open / closed; (configurable)	
Max. voltage drop switching output DC	[V]	2.5	
Permanent current rating of switching output DC	[mA]	150; (per output)	
Number of analog outputs		1	
Analog current output	[mA]	4...20; (scalable)	
Max. load	[Ω]	500	
Pulse output		consumed quantity meter	
Short-circuit protection		yes	
Type of short-circuit protection		yes (non-latching)	
Overload protection		yes	
Measuring/setting range			
Measuring range	4...1250 l/min	0.3...99.8 m/s	0.25...75 m³/h
Display range	0...1500 l/min	0...119.8 m/s	0...90 m³/h
Resolution	1 l/min	0.1 m/s	0.05 m³/h
Set point SP	11...1250 l/min	0.9...99.8 m/s	0.65...74.97 m³/h
Reset point rP	5...1243 l/min	0.4...99.3 m/s	0.28...74.6 m³/h
Analog start point ASP	0...1000 l/min	0...79.8 m/s	0...60 m³/h
Analog end point AEP	250...1250 l/min	20...99.8 m/s	15...75 m³/h
Low flow cut-off LFC	1...13 l/min	0.1...1.1 m/s	0.09...0.8 m³/h
In steps of	1 l/min	0.1 m/s	0.01 m³/h

SD6500



Compressed air meter

SDR12DGXFRKG/US-100

Pressure monitoring		
Measuring range	[bar]	-1...16
Display range	[bar]	-1...20
Resolution	[bar]	0.05
Set point SP	[bar]	-0.92...16
Reset point rP	[bar]	-1...15.92
Analog start point	[bar]	-1...12.8
Analog end point	[bar]	2.2...16
In steps of	[bar]	0.01
Volumetric flow quantity monitoring		
Measuring range		0...100000000 m³
Display range		0...100000000 m³
Set point SP		0.001...10000000 m³
Pulse value		0.001...10000000 m³
In steps of		0.0001 m³
Pulse length	[s]	0.002...2
Temperature monitoring		
Measuring range		-10...60 °C
Display range		-24...74 °C
Resolution		0.2 °C
Set point SP		-9.7...60 °C
Reset point rP		-10...59.7 °C
Analog start point		-10...46 °C
Analog end point		4...60 °C
In steps of		0.1 °C
Accuracy / deviations		
Temperature coefficient	[1/K]	± 0,07 % MW
Accuracy (in the measuring range)		class 141: ± (2 % MW + 0,5 % MEW); class 344: ± (6 % MW + 0,6 % MEW) ; air quality to ISO 8573-1:2010; at medium temperature 23 °C
Repeatability		± (0,4 % MW + 0,1 % MEW)
Pressure monitoring		
Repeatability	[% of the final value]	± 0,2
Characteristics deviation	[% of the final value]	< ± 0,5; (BFSL = Best Fit Straight Line)
Greatest TEMPCO of the span	[% MEW / 10 K]	± 0,15
Greatest TEMPCO of the zero point	[% MEW / 10 K]	± 0,25
Temperature monitoring		
Accuracy	[K]	± 0,5; (medium flow in the limit area of the flow measurement range)
Reaction times		
Response time	[s]	0.1; (dAP = 0)
Damping for the switching output dAP	[s]	0...5

SD6500

Compressed air meter

SDR12DGXFRKG/US-100



Pressure monitoring		
Response time	[s]	0.05
Temperature monitoring		
Dynamic response T05 / T09	[s]	T09 = 0,5
Software / programming		
Parameter setting options		hysteresis / window; normally open / closed; current/pulse output; display can be rotated and switched off; Display unit; totalizer
Interfaces		
Communication interface		IO-Link
Transmission type		COM2 (38,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9 CDV
IO-Link device ID		862 d / 00 03 5d h
Profiles		Digital Measuring Sensor (0x800A), Identification and Diagnosis (0x4000)
SIO mode		yes
Required master port class		A
Process data analogue		8
Process data binary		2
Min. process cycle time	[ms]	7.2
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...85
Max. relative air humidity	[%]	90
Protection		IP 65; IP 67
Tests / approvals		
EMC		DIN EN 60947-5-9
Vibration resistance		DIN EN 68000-2-6
MTTF	[years]	183
UL approval		UL approval number I012 File number UL E174189
Pressure equipment directive		sound engineering practice; can be used for stable gases fluid group 2
Mechanical data		
Weight	[K40]	728.5
Material		PBT+PC-GF30; PPS GF40; stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); steel (1.5523) galvanised; 2.0401 (brass / CW614N); FKM
Materials (wetted parts)		stainless steel (1.4301 / 304); stainless steel (1.4305 / 303); FKM; ceramics glass passivated; PPS GF40; Al2O3 (ceramics); acrylate
Process connection		threaded connection R 1/2 DN15
Displays / operating elements		
Display		Colour display 1,44", 128 x 128 pixels 2 x LED, yellow

SD6500



Compressed air meter

SDR12DGXFRKG/US-100

Remarks

MW = Measured value

MEW = Final value of the measuring range

Remarks

Measuring, display and setting ranges refer to
standard volume flow according to DIN ISO 2533.


For information about installation and operation please see the operating instructions.

Pack quantity

1 pcs.

Electrical connection


Connector: 1 x M12



Compressed air meter

SDR12DGXFRKG/US-100

Connection

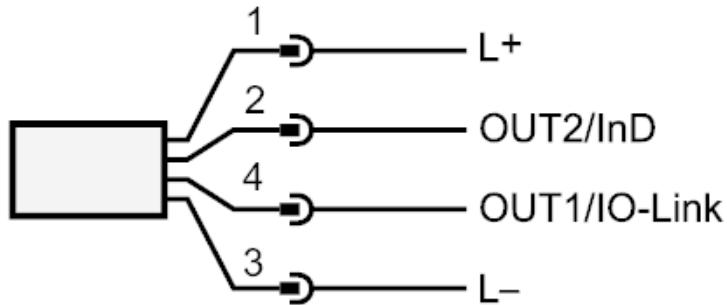

- OUT1/IO-Link:
- Switching output flow
 - Switching output temperature
 - Switching output pressure
 - Pulse output quantity meter
 - signal output Preset counter
- OUT2/InD:
- Switching output flow
 - Switching output temperature
 - Switching output pressure
 - analog output flow
 - analog output temperature
 - analog output pressure
 - signal output Preset counter
 - Pulse output quantity meter
 - Input counter reset