


VARIABLE AREA TYPE FLOW METER

Model CYH-100F

白鐵

REED SWITCH

塑膠

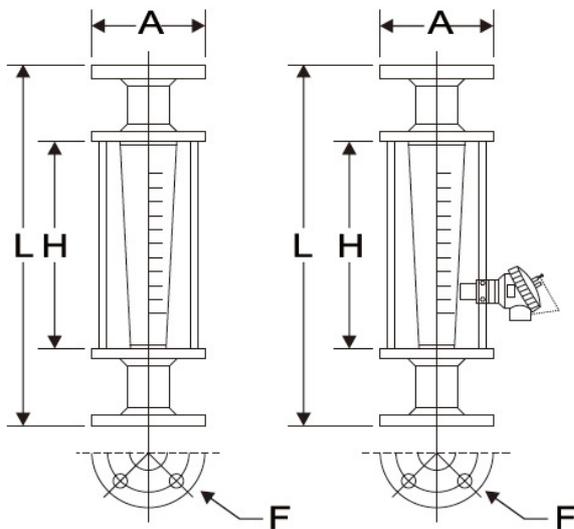

DIMENSIONS

	10	15	18	20	25	32	40	50	65	80	100	125	150
L	260	260	260	340	340	340	340	340	340	410	430	450	450
H	150	150	150	200	200	200	200	200	200	250	250	250	250
A	90	95	95	100	125	135	140	155	175	185	210	250	280
F	1/4	1/2	1/2	3/4	1	1 1/4	1 1/2	2	2 1/2	3	4	5	6

SPECIFICATIONS


Model	FS	FW	FX	FV	FP	FC	FD	GLASS	PC
Max.Temp	100°C			60°C	70°C	90°C	120°C	100°C	
Max. Press	10kg/cm ² G			6kg/cm ² G			4-6 kg	6-12 kg	
Accuracy	WATER ± 3% F.S			AIR ± 4% F.S					

ORDERING INFORMATION

Body Material	Connection Type	Tube Material	Float Material	Seal Material
S SS304	J JIS 10K	G GLASS	S SS304	N NEOPRENE
W SS316	A ANSI 150LB	P PC	W SS316	V VITON
V P.V.C	D DIN PN16		V P.V.C	T TEFLON
P P.P	O OTHER		P P.P	
D P.V.D.F			D P.V.D.F	
X SS316L			X SS316L	
C C.P.V.C			C C.P.V.C	

Connection Size			Alarm Switch
10 3/8"	32 1 1/4"	80 3"	N NONE
15 1/2"	40 1 1/2"	100 4"	H HI
20 3/4"	50 2"	125 5"	L LO
25 1"	65 2 1/2"	150 6"	A HI LO

Tube Size	Normal Flow Range			
	WATER	L/MIN	AIR	NL/MIN
10	0.03-0.3	0.08-0.8	0.5-5.0	1-15
	0.05-0.5	0.1-1.0	1-10	2-20
15	0.1-1.0	0.3-3.0	3-30	6-60
	0.2-2.0	0.4-4.0	5-50	8-80
18	0.5-5.0	1-10	10-100	20-200
	0.6-6.0	1-15	15-150	25-250
20	1-10	2-20	20-200	30-300
	1-15	3-30	25-250	50-500
25	3-30	5-50	50-500	100-1000
	4-40	8-80	80-800	150-1500
32	5-50	10-100	150-1500	250-2500
	8-80	12-120	200-2000	300-3000
40	15-150	25-250	250-2500	350-3500
	20-200	30-300	300-3000	400-4000
50	30-300	50-500	350-3500	450-4500
	40-400	60-600	400-4000	500-5000
65	40-400	60-600	450-4500	600-6000
	50-500	200-800	500-5000	700-7000
80	60-600	100-1000	700-7000	900-9000
	80-800	120-1200	800-8000	1000-10000
100	100-1000	160-1600	900-9000	1200-12000
	120-1200	200-2000	1000-10000	1500-15000
125	100-1000	160-1600	900-9000	1200-12000
	120-1200	250-2500	1000-10000	1500-15000
150	100-1000	160-1600	900-9000	1200-12000
	120-1200	250-2500	1000-10000	1500-15000

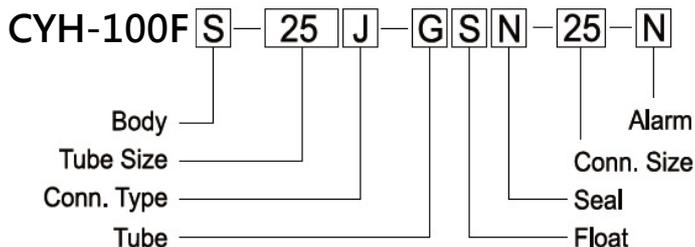

NOTE: 各尺寸流量，均可以依客戶需求訂製